

AMATIS NT



AMATIS NT




Amatis series cabinets are designed to create an excellent balance between design and functionality, using a modular glass door display system, standard for frozen applications Amatis LT with the optional of a chilled complementary version Amatis NT. An option for heated glass and film-coated energy saving glass system to reduce energy consumption, the Amatis offers optimum display, even when the doors are being repeatedly opened. EN

Accessories



Wire shelves

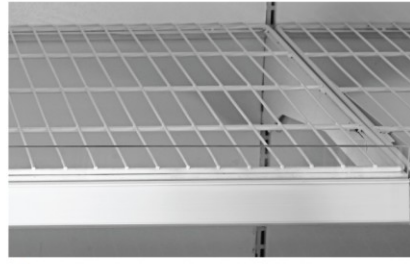

Plexi front riser




Aluminium glass door




Wire basket

Technical Data

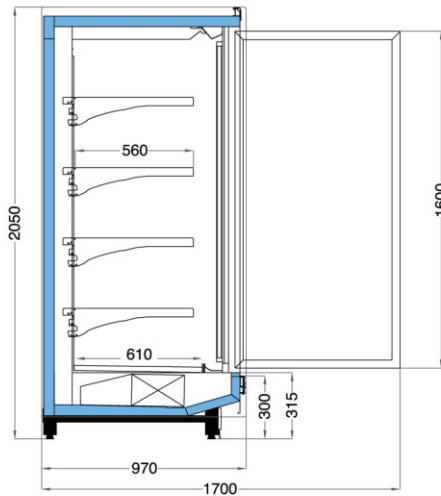

AMATIS NT 2050

	1560 2 Doors	2340 3 Doors	3120 4 Doors	3900 5 Doors
Length mm	1560	2340	3120	3900
Display Area m ²	4,43	6,65	8,86	11,08
End Panel Thickness mm	50			

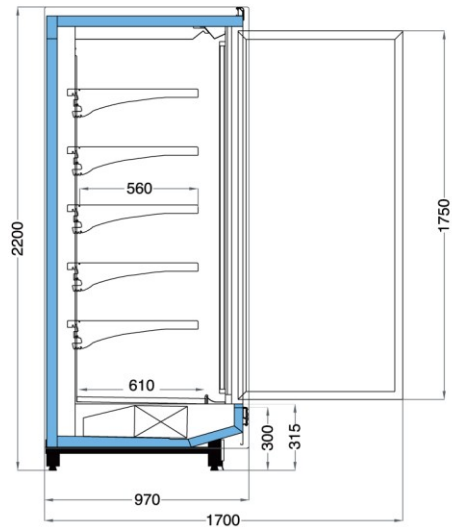

AMATIS NT 2200

	1560 2 Doors	2340 3 Doors	3120 4 Doors	3900 5 Doors
Length mm	1560	2340	3120	3900
Display Area m ²	5,30	7,96	10,60	13,26
End Panel Thickness mm	50			

Operating features shown are based on ambient conditions of 25°C temperatures and 60% RH.
Operatin Voltage : 230 V / 50 Hz